



**These instructions are intended to assist in the fitment of your Oil or Water cap cover**


(Please note that a generic photo has been used and your supplied cap may differ in design)

**Caution**

Engine components may be hot, ensure that your engine is cool before attempting any work

It is normally easier to remove the OEM cap from the car before fitting commences.

The oil or water cap covers supplied are designed to fit over the original plastic cap and are then secured by one, or on certain covers two, grub screw(s). These grub screws require the use of a 1.5 mm allen key. When securing, only tighten until resistance is felt then continue for half a rotation only.

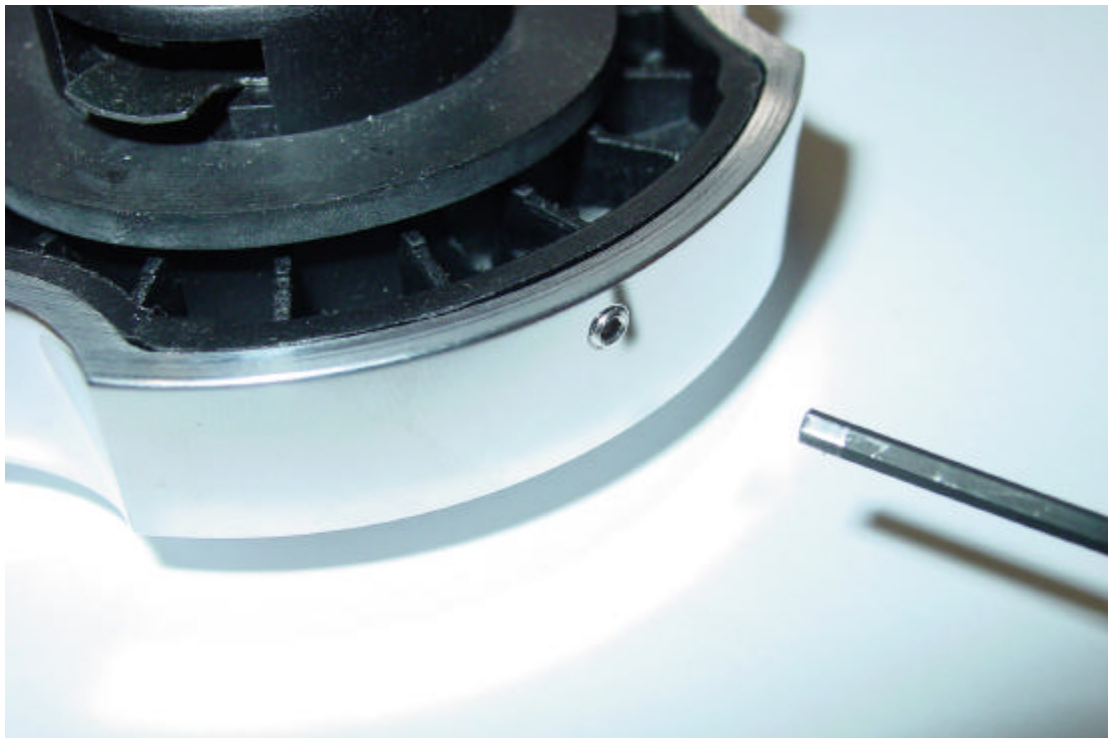

If you have any difficulty with your installation please call our sales team who will be able to offer their assistance. (+44 (0)1452 380999)